




# Lecture #11

## Relational Database Systems



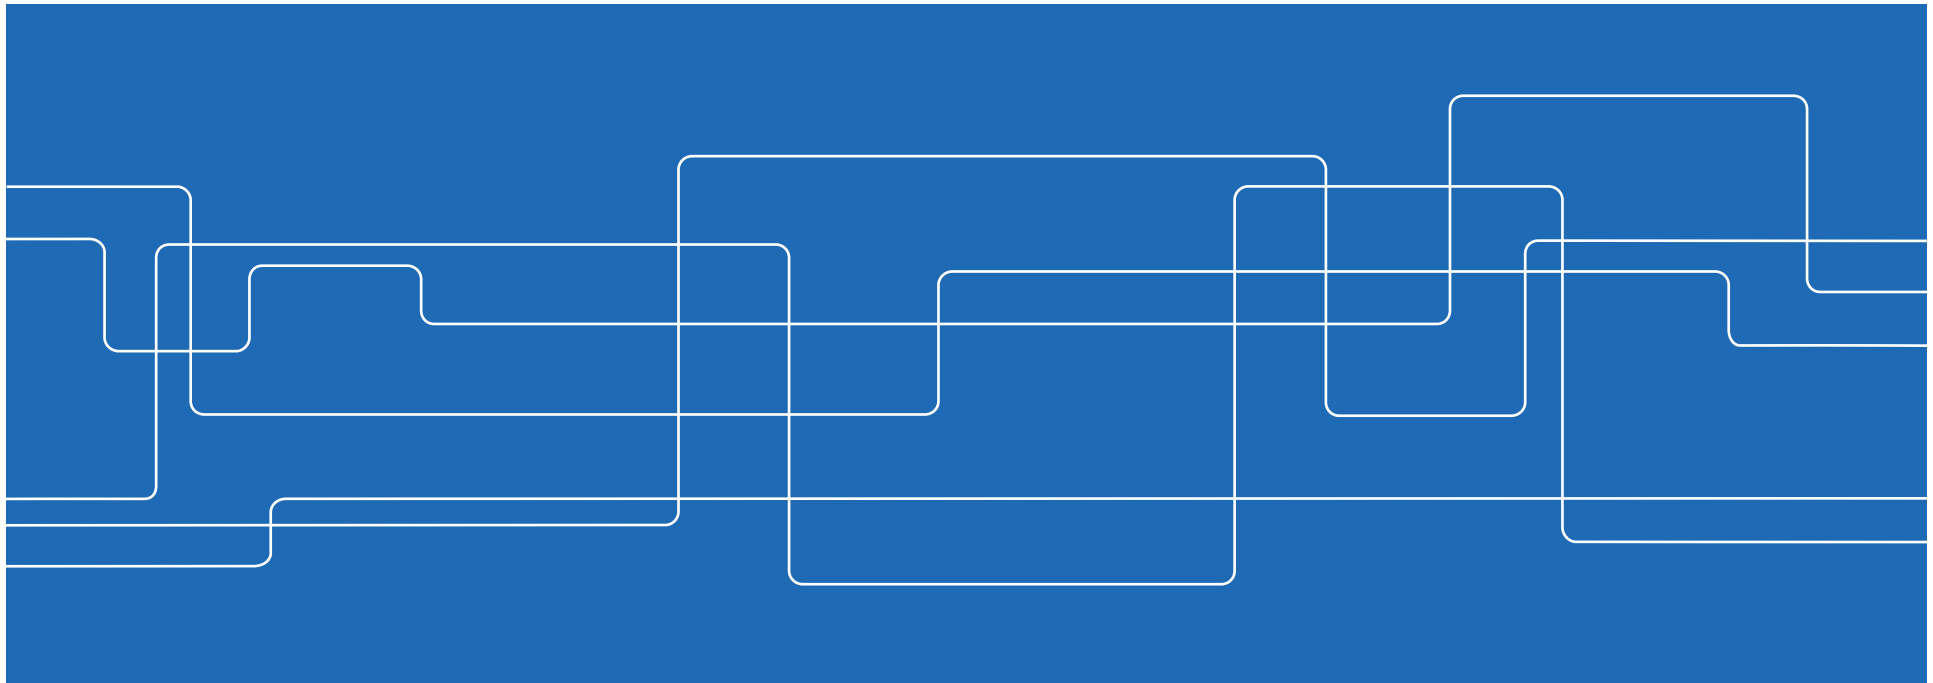

# Contents

Storing data

Relational Database Systems


Entity Relationship diagrams

Normalisation of ER diagrams

Tuple Relational Calculus



## Storing data persistently

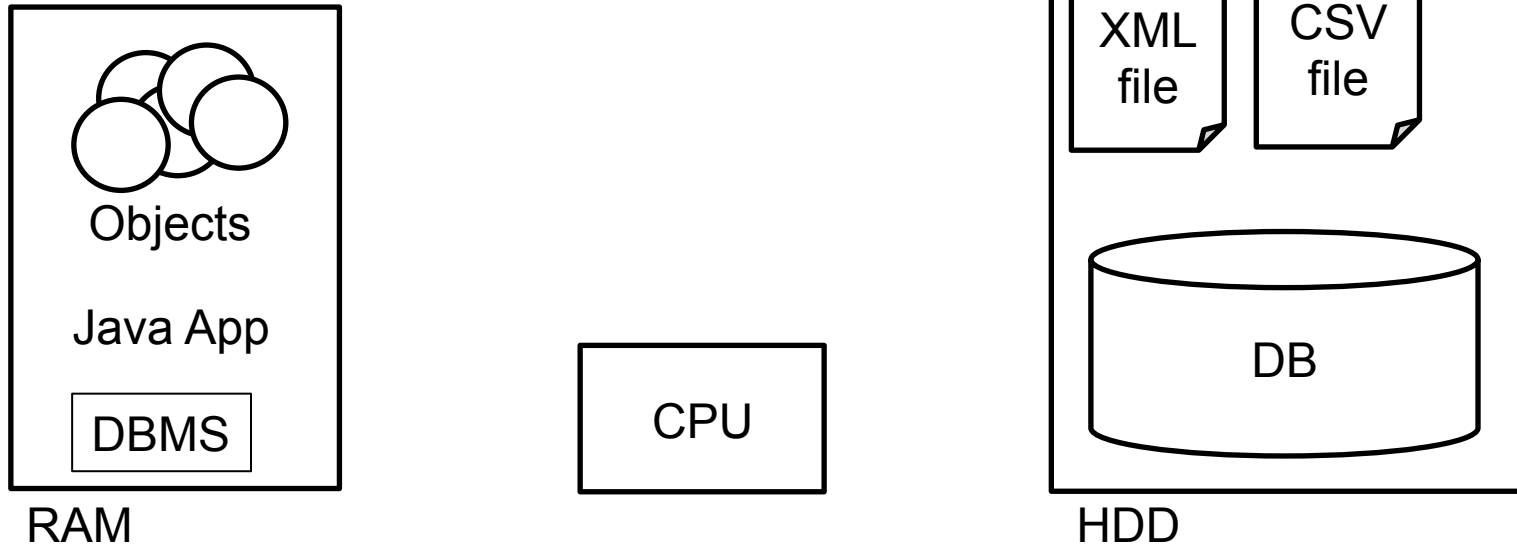

During execution, RAM is used to store our data  
Files can be read and write for persistent storage  
But what if we want to access the data in a more flexible way?  
Reading single posts, adding data, removing data etc.



# Databases

## Database Management Systems (DBMS)

The idea of data storage developed gradually when computing capabilities grew – file storage was simply not enough

Various models to link and index that data were developed:

- Hierarchical storage (Tree-like structure)
- Network storage (cross references between data items)
- Relational storage (the winning model, used presently)



# Relational data storage

Data is organised in tables of two dimensions

Rows & Columns

Tables are known as "Relations"

Rows are "Tuples"


Columns are "Attributes"

ID	Name	Grade
1	Jill	D
2	Bob	B
3	Steve	C



# Cardinality & Degree

Attributes

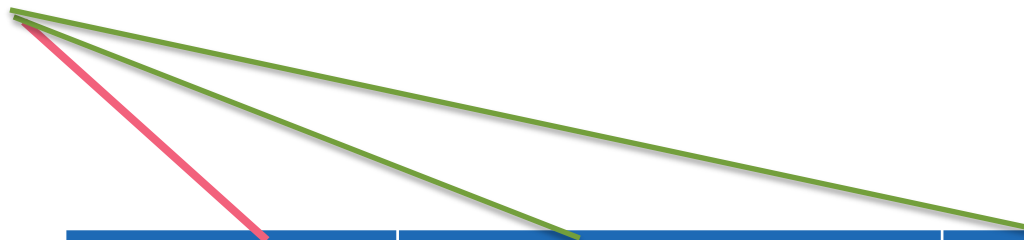

Tuples



ID	Name	Grade
1	Jill	D
2	Bob	B
3	Steve	C

The cardinality of a Relation is its number of tuples (rows)


The degree of a Relation is its number of attributes (columns)





# What are these tables really?

1. Data is stored on the computer's HDD as bits (of course)
2. The data is structured according to some scheme that is efficient for the disk and CPU's access to the data
3. When we people want to write a (Java) program to manipulate the data, we think of it, and access it in the form of tables
4. The DBMS program translate from the tables to actual data storage (which is logical to the CPU but not to us)

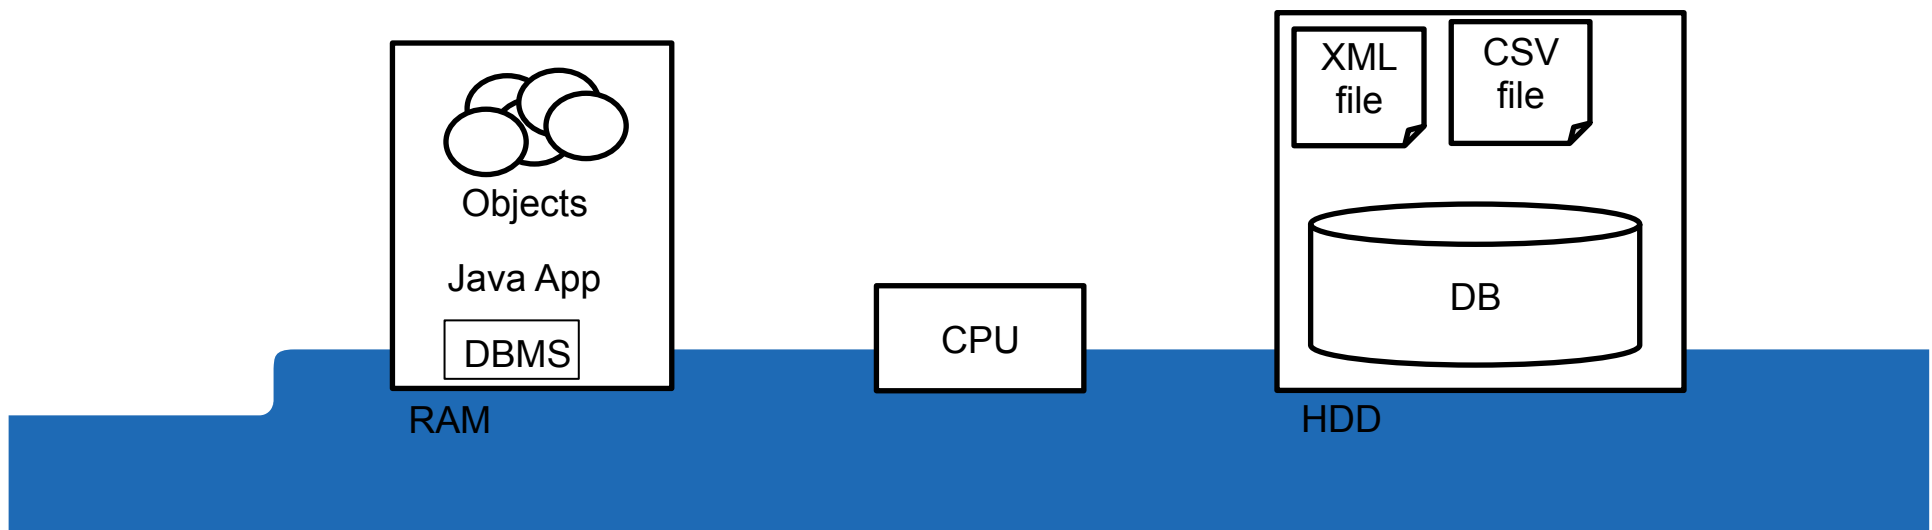



# Contents

Storing data

Relational Database Systems

**Entity Relationship diagrams**

Normalisation of ER diagrams

Tuple Relational Calculus





# Entity Relationship Diagrams

## ”Relations between Relations”

DEPARTMENT

No	Name
...	...
...	...
...	...

PROFESSORS

ID	Name	Dept-No	Courses
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...

COURSES

No	Dept-No	Prof-ID	Unit
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...

STUDENTS


ID	Name	Courses
...	...	...
...	...	...
...	...	...
...	...	...

By defining attributes as "Keys" we can relate Tuples from different Relations to each other.



# E-R diagrams vs. Class diagrams

But aren't E-R diagrams the same as Class diagrams?

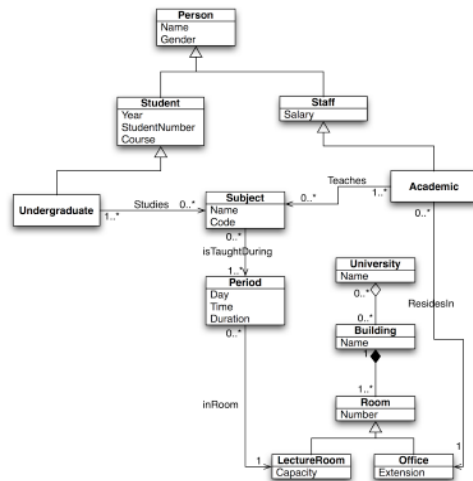

??

DEPARTMENT

No	Name
...	...
...	...
...	...

PROFESSORS

ID	Name	Dept-No	Courses
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...

COURSES

No	Dept-No	Prof-ID	Unit
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...

STUDENTS

ID	Name	Courses
...	...	...
...	...	...
...	...	...
...	...	...

In a way, they are very similar, but

- ER – only data, no methods
- ER – No OO concepts (inheritance, aggregation, etc.)
- Classes – No Keys



# Contents

Storing data

Relational Database Systems

Entity Relationship diagrams

**Normalisation of ER diagrams**

Tuple Relational Calculus



## Good relations

Is this a good relation?

Part	Qt	Warehouse	Adress
Wheel	23	Building2	Main St 12
Wheel	12	Building1	Diagon Alley 3
Seat	9	Building1	Diagon Alley 3

Is this a good relation?





## E-R Diagrams "must" be Normalised

- Normalisation of E-R diagrams is like "Good Programming Style" but for Data
- It enables more efficient access to data and more efficient storage
- Reduces the risk of error in data.
- In Theory 5 levels of Normality (or Normal forms) exist
  - 1st Normal form
  - 2nd Normal form
  - 3rd Normal Form
  - 4th Normal Form
  - 5th Normal Form





# First Normal Form

The First Normal is basic housekeeping.

- All Tuples in a Relation must have the same number of attributes.
- Or The degree of all Tuples must be the same.

This borders on the obvious under the definition of a Relational Database, since this is the definition of a Relation



## Second Normal Form

Only relevant when the keys are composite, i.e., consists of several attributes

To fulfill Second normal form non-key fields cannot have facts about a part of a key.

Warehouse	Part	Adress	Qt
Building2	Wheel	Main St 12	23
Building1	Wheel	Diagon Alley 3	12
Building1	Seat	Diagon Alley 3	9

Keys



## Normalised to 2nd Normal Form

Warehou se	Part	Qt
Building2	Wheel	23
Building1	Wheel	12
Building1	Seat	9

Keys

Warehouse	Adress
Building1	Diagon Alley 3
Building2	Main St 12







## Third Normal Form

In Third Normal Form, a non-key attribute must not hold information about another non-key attribute

Course	Professor	Office
EH2745	Nordström	Osquldas väg 10, floor 7
EH2751	Nordström	Osquldas väg 10, floor 7
EJ2301	Soulard	Teknikringen 33, floor 1
EG2200	Amelin	Reknikringen 35, floor 2

Key



## Normalised to 3rd Normal form

Course	Professor
EH2745	Nordström
EH2751	Nordström
EJ2301	Soulard
EG2200	Amelin

Professor	Office
Nordström	Osquldas väg 10, floor 7
Amelin	Teknikringen 33, floor 2
Soulard	Teknikringen 33, floor 1



# Contents

Storing data

Relational Database Systems

Entity Relationship diagrams

Normalisation of ER diagrams

**Tuple Relational Calculus**





## Tuple Relational Calculus

With the definitions (Relation, Tuple, Attribute) above we can define a number of basic operations on relations

Insert

Delete

Update

Select

Project

Join

Union

Intersection


Difference



# Insert

Insert is a unary operation – it operates on a single Relation  
It adds a Tuple to a Relation

ID	Name	Grade
1	Jill	D
2	Bob	B
3	Steve	C



ID	Name	Grade
1	Jill	D
2	Bob	B
3	Steve	C
4	Lars	A

Insert  $t$  in  $R$






# Delete

Delete is a unary operation – it operates on a single Relation  
It deletes a Tuple fulfilling criteria from a Relation

ID	Name	Grade
1	Jill	D
2	Bob	B
3	Steve	C
4	Lars	A



ID	Name	Grade
1	Jill	D
2	Bob	B
4	Lars	A

Delete t where a=x from R






# Update

Update is a unary operation – it operates on a single Relation  
It modifies an attribute in Tuple fulfilling criteria in a Relation

ID	Name	Grade
1	Jill	D
2	Bob	B
4	Lars	A



ID	Name	Grade
1	Jill	D
2	Bob	B
4	Lars	E

Update  $t.a_2 = \text{data}$  where  $t.a_1 = x$  in R






# Select

Select is a unary operation – it operates on a single Relation

The Select operation creates a new relation R2 from relation R1

The Tuples in R1 is a subset of R2

ID	Name	Grade
1	Jill	D
2	Bob	B
4	Lars	E



ID	Name	Grade
2	Bob	B
4	Lars	E

```
Select * from R1 where ID >1
```








# Project

Project is a unary operation – it operates on a single Relation

The Project operation creates a new relation R2 from relation R1

The Attributes in R1 is a subset of R2

ID	Name	Grade
1	Jill	D
2	Bob	B
4	Lars	E



Name
Jill
Bob
Lars

Project Name from R1





# Join

Join is a binary operation – it operates two Relations

The Join operation creates a new relation R3 from relations R1 & R2

Based on common attributes (keys)

Course	Professor
EH2745	Nordström
EH2751	Nordström
EJ2301	Soulard
EG2200	Amelin

X



Professor	Office
Nordström	Osquldas väg 10, floor 7
Amelin	Teknikringen 33, floor 2
Soulard	Teknikringen 33, floor 1

## Not Normalised??

Course	Professor	Office
EH2745	Nordström	Osquldas väg 10, floor 7
EH2751	Nordström	Osquldas väg 10, floor 7
EJ2301	Soulard	Teknikringen 33, floor 1
EG2200	Amelin	Reknikringen 35, floor 2

Intermediate result for analysis



# Union

A binary operation – it operates on two Relations R1 and R2  
Creates a new relation R3 in which each tuple is either in R1, in the R2,  
or in both R1 and R2.

The two relations must have the same attributes.

Warehouse	Adress
Building3	King St 23
Building4	Queens Rd 2

+

Warehouse	Adress
Building1	Diagon Alley 3
Building2	Main St 12



Warehouse	Adress
Building1	Diagon Alley 3
Building2	Main St 12
Building3	King St 23
Building4	Queens Rd 2





# Intersection

A binary operation – it operates on two Relations R1 and R2  
Creates a new relation R3 in which each tuple is in both R1 and R2.  
The two relations must have the same attributes.

Warehouse	Adress
Building1	Diagon Alley 3
Building4	Queens Rd 2



Warehouse	Adress
Building1	Diagon Alley 3

Warehouse	Adress
Building1	Diagon Alley 3
Building2	Main St 12





# Difference

A binary operation – it operates on two Relations R1 and R2  
Creates a new relation R3 in which each tuple is in R1 but not in R2.  
The two relations must have the same attributes.

Warehouse	Adress
Building1	Diagon Alley 3
Building4	Queens Rd 2

-

Warehouse	Adress
Building1	Diagon Alley 3
Building2	Main St 12



Warehouse	Adress
Building4	Queens Road 2





# Contents

Storing data

Relational Database Systems

Entity Relationship diagrams

Normalisation of ER diagrams

Tuple Relational Calculus

Now you can try this with SQL in MySQL